


## LENO LIFESTYLE

<b>TYPE OF INSTALLATION</b>	Dry Back ( Glue Down )
<b>APPLICATION</b>	Heavy Residential / Light Commercial
<b>WEAR LAYER THICKNESS</b>	0.3mm
<b>OVERALL THICKNESS</b>	2mm
<b>PLANK SIZE</b>	1227mm x 187mm
<b>QUANTITY PER BOX</b>	4.589m <sup>2</sup>
<b>NUMBER OF PLANKS</b>	20 planks per box
<b>FIRE RESISTANCE</b>	B(f1) s1 (EN 13501-1)
<b>STAIN AND CHEMICAL RESISTANCE</b>	Pass (EN 423)
<b>ABRASION RESISTANCE</b>	Wear group T (EN 660-2)
<b>SLIP RESISTANCE</b>	Class DS (EN13893)
<b>VOC TESTED</b>	Floor Score Certified
<b>CASTOR CHAIR</b>	USE non-staining wheels (EN425)
<b>COLOUR FASTNESS</b>	ISO 10581: 6 or above
<b>SURFACE TEXTURE</b>	BP - R ribbed

## VINYL FLOORING FOR GLUING



- very elastic
- minimal thickness of 2 mm
- particularly durable and long-lasting

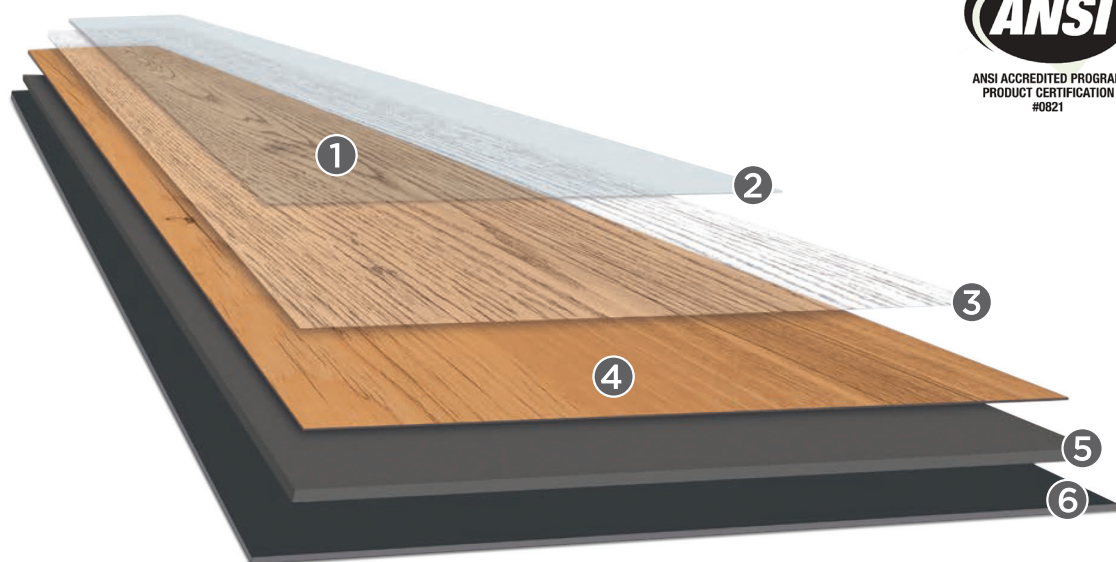

- 1 Surface seal**  
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**  
A ribbed surface texture ensures an authentic feel and appearance.
- 3 Wear layer**  
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**  
The decor film offers a host of design options.
- 5 Base layer**  
Lends the product a high level of dimensional stability and optimum point-load resistance.
- 6 Backing**  
With its waffle back texture, it is used to help ensure balance and optimal installation