


TYPE OF INSTALLATION	Dry Back (Glue Down)
APPLICATION	Heavy Residential / Heavy Commercial
WEAR LAYER THICKNESS	0.55mm
OVERALL THICKNESS	2mm
PLANK SIZE	457.2mm x 914.4mm
QUANTITY PER BOX	5.02m ²
NUMBER OF PLANKS	12 planks per box
FIRE RESISTANCE	B(f1) s1 (EN 13501-1)
STAIN AND CHEMICAL RESISTANCE	No Defects (ISO 26987)
ABRASION RESISTANCE	Wear group T (EN 660-2)
SLIP RESISTANCE	Class DS (EN13893)
VOC TESTED	FloorScore Certified
CASTOR CHAIR	USE non-staining wheels (EN425)
COLOUR FASTNESS	ISO 10581: 6 or above
SURFACE TEXTURE	I.03 mat

VINYL FLOORING FOR GLUING



- very elastic
- minimal thickness of 2 mm
- particularly durable and long-lasting

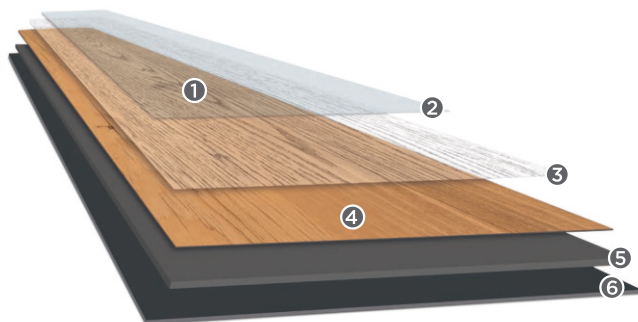

- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**
A smooth surface texture ensures an authentic tile feel and appearance.
- 3 Wear layer**
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.
- 4 Design**
The decor film offers a host of design options.
- 5 Base layer**
Lends the product a high level of dimensional stability and optimum point-load resistance.
- 6 Backing**
With its waffle back texture, it is used to help ensure balance and optimal installation