


LENO OPTIMUM

Bisquit

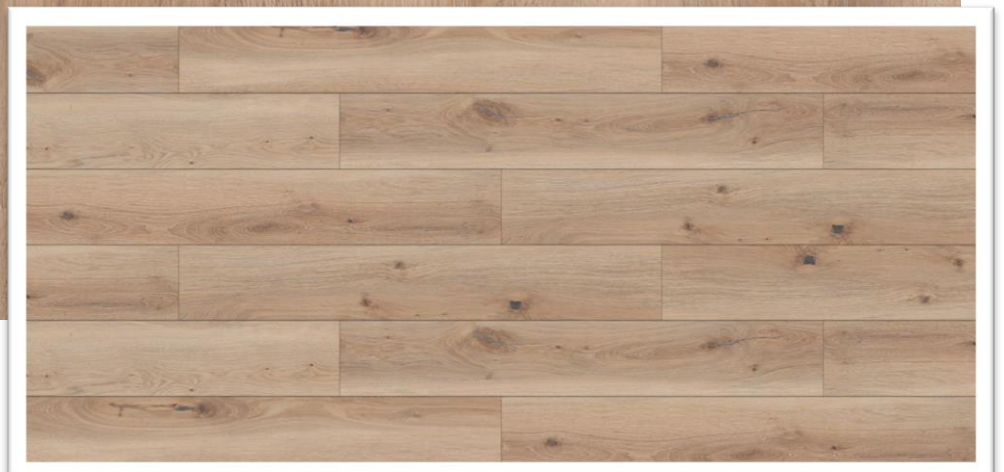

LENO OPTIMUM

Castle Oak



LENO OPTIMUM

Chene Grey




LENO OPTIMUM

English Brown




LENO OPTIMUM

Icy Mountain

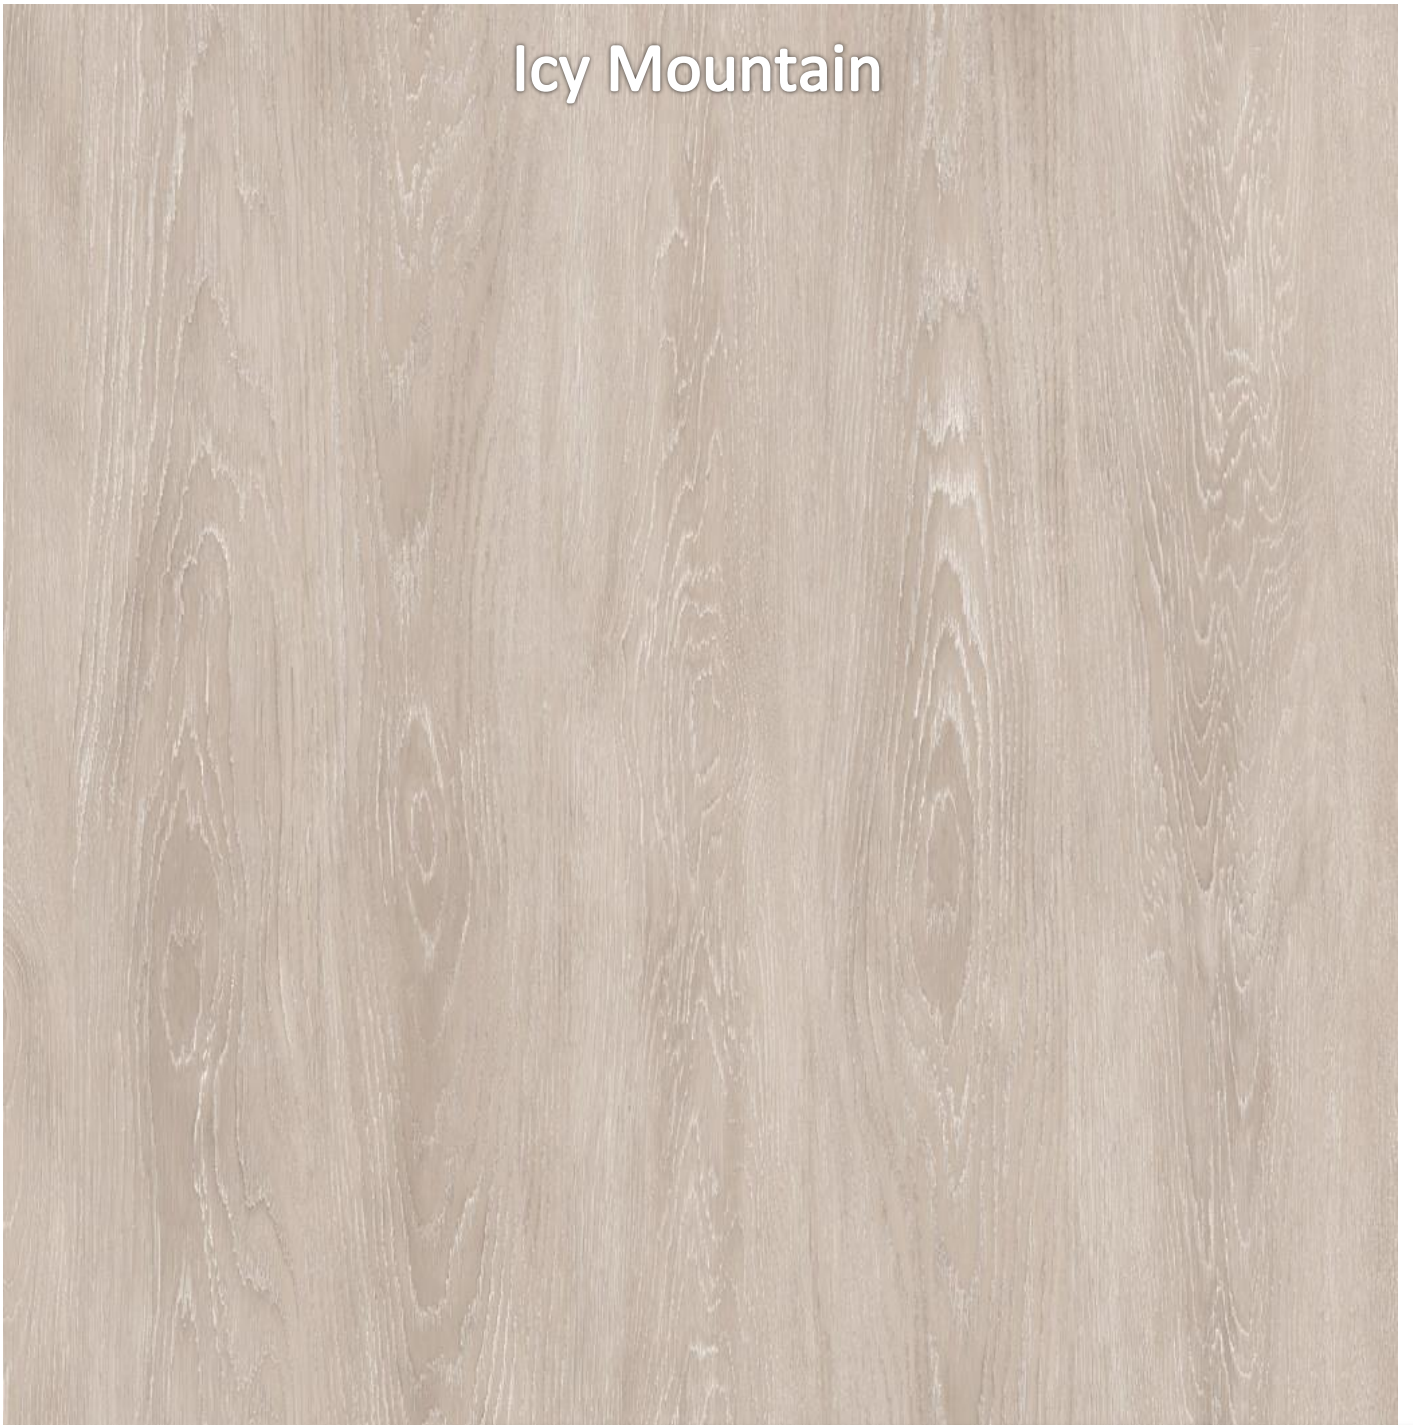

LENO OPTIMUM

Mordent Oak

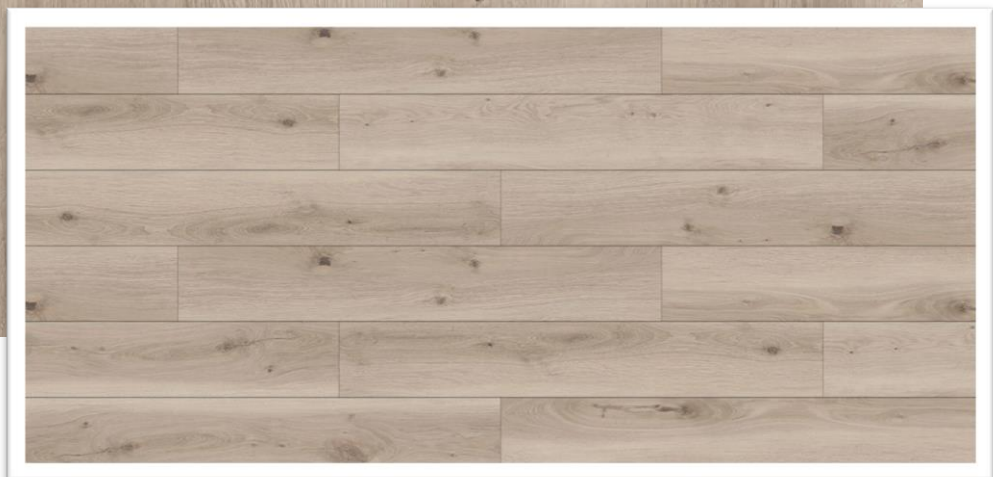



LENO OPTIMUM

TYPE OF INSTALLATION	Dry Back (Glue Down)
APPLICATION	Heavy Residential / Light Commercial
WEAR LAYER THICKNESS	0.3mm
OVERALL THICKNESS	2mm
PLANK SIZE	228.6mm x 1219.2mm
QUANTITY PER BOX	5.01 m ²
NUMBER OF PLANKS	18 planks per box
FIRE RESISTANCE	B(f1) s1 (EN 13501-1)
STAIN AND CHEMICAL RESISTANCE	Pass (EN 423)
ABRASION RESISTANCE	Wear group T (EN 660-2)
SLIP RESISTANCE	Class DS (EN13893)
VOC TESTED	Floor Score Certified
CASTOR CHAIR	USE non-staining wheels (EN425)
COLOUR FASTNESS	ISO 10581: 6 or above
SURFACE TEXTURE	I-14 mat

VINYL FLOORING FOR GLUING



- very elastic
- minimal thickness of 2 mm
- particularly durable and long-lasting



CERTIFIED BY
SCS Global Services



- 1 Surface seal**
Protects the product and enables easy cleaning and maintenance.
- 2 Surface texture**
A ribbed surface texture ensures an authentic feel and appearance.
- 3 Wear layer**
Guarantees a high level of durability and is the basis for categorising flooring into the respective application areas.

- 4 Design**
The decor film offers a host of design options.
- 5 Base layer**
Lends the product a high level of dimensional stability and optimum point-load resistance.
- 6 Backing**
With its waffle back texture, it is used to help ensure balance and optimal installation.